
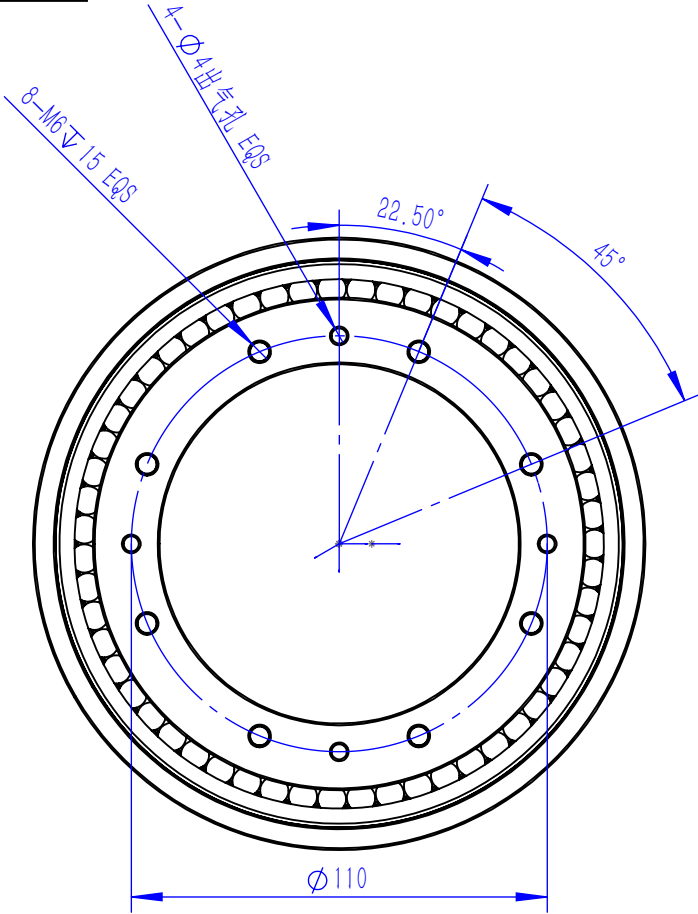
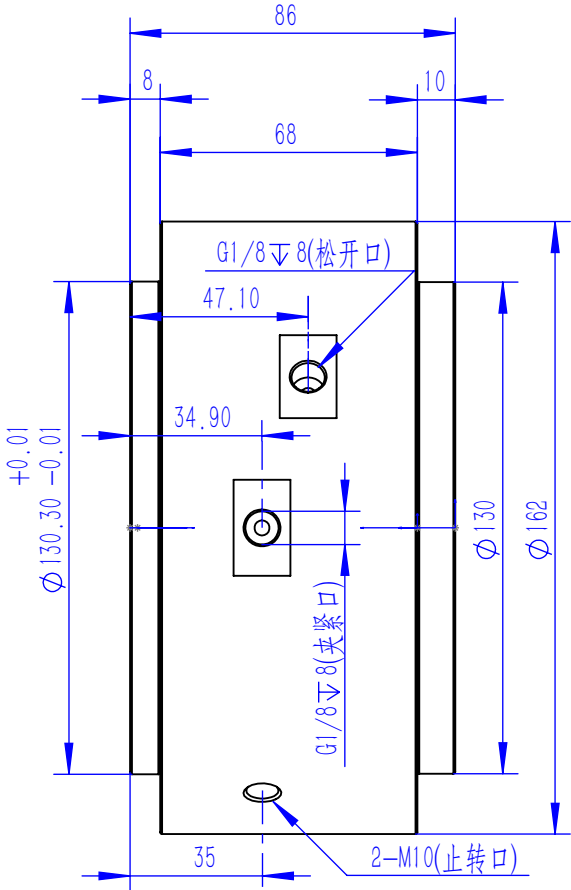


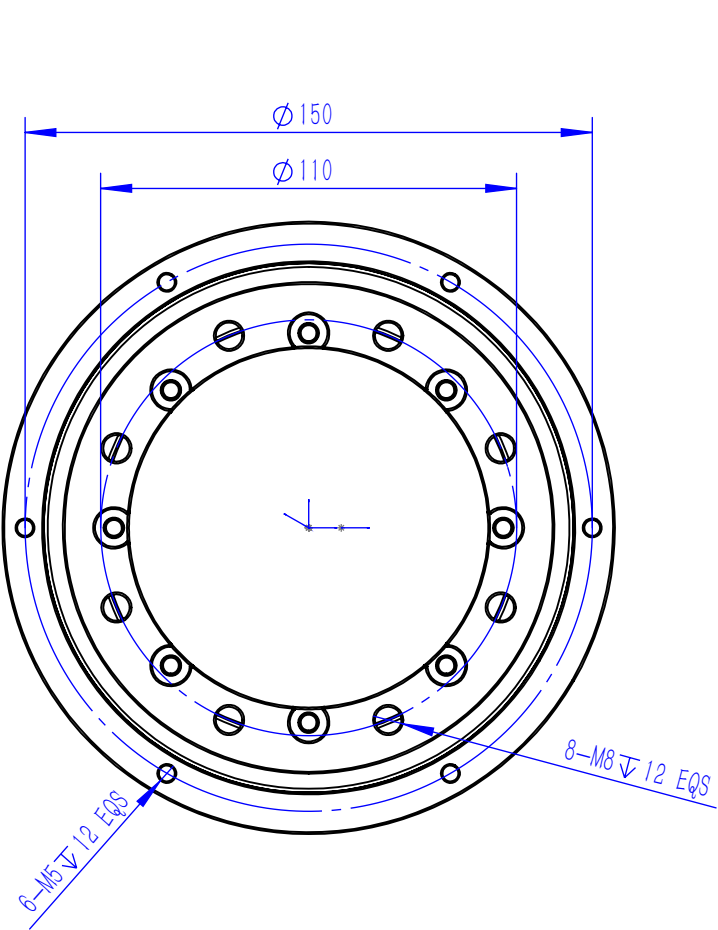

1. All sharp edges deburred 0.3 mm per ISO 13715
2. Unspecified tolerances per ISO 2768-m
4. Surface finish Ra 3.2 unless specified
5. Material certificates available on request

| Ningbo BEGAPUNK Pneumatic Components Co., Ltd. |                                    |                     |           |                  |               |
|------------------------------------------------|------------------------------------|---------------------|-----------|------------------|---------------|
| Medium                                         | Air                                | Material            | Weight    | Scale            | Rotary Joint  |
| Max. Pressure                                  | 1 MPa                              |                     |           |                  |               |
| Max. RPM                                       | 200                                | Aluminum Alloy 6061 | 4260g     | 1:2              |               |
| Temperature Range                              | -20° C ~ 80° C<br>(-4° F ~ 176° F) | BEGAPUNK            |           |                  | BP-2P-95-0005 |
| Surface Treatment                              | Anodized (Aluminum)                |                     |           |                  |               |
| Seal Material                                  | PTFE, O-Ring                       | Date                | 2025-5-12 | www.begapunk.com |               |